


Dimension DN 100 to DN 600

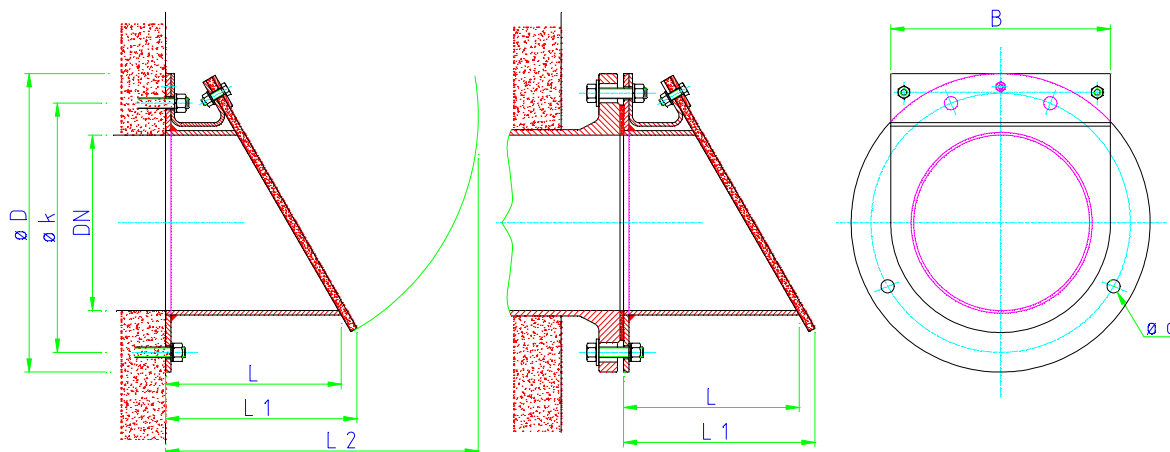

Wall fixing

Pipe flange fixing
with reduced blade thickness,
suitable for local flange acc.
DIN 2501 PN 10

Dimension	Ø D	Ø k	L	L1	L2	B	Ø d	Weight [kg]
DN 100	220	180	160	180	180	150	13	4
DN 125	250	210	160	180	225	175	13	5
DN 150	285	240	180	200	270	200	13	6
DN 200	340	295	200	220	350	250	15	8
DN 250	395	350	250	275	450	310	15	13
DN 300	445	400	300	325	540	360	15	18
DN 350	505	460	350	375	630	410	15	28
DN 400	565	515	400	425	720	460	15	34
DN 500	670	620	500	525	900	560	15	46
DN 600	780	725	600	625	1050	660	15	63

All dimensions in mm

Design: TESACO, acc. to DIN 19569-4

Material: Flange and pipe socket fabricated from S.S. 304 or S.S. 316
 Flap holder fabricated from S.S. 304 or S.S. 316
 Flap (Cover) fabricated from rubber neoprene
 Fastening elements made from S.S.316

Corrosion protection: Stainless steel pickled and passivated