


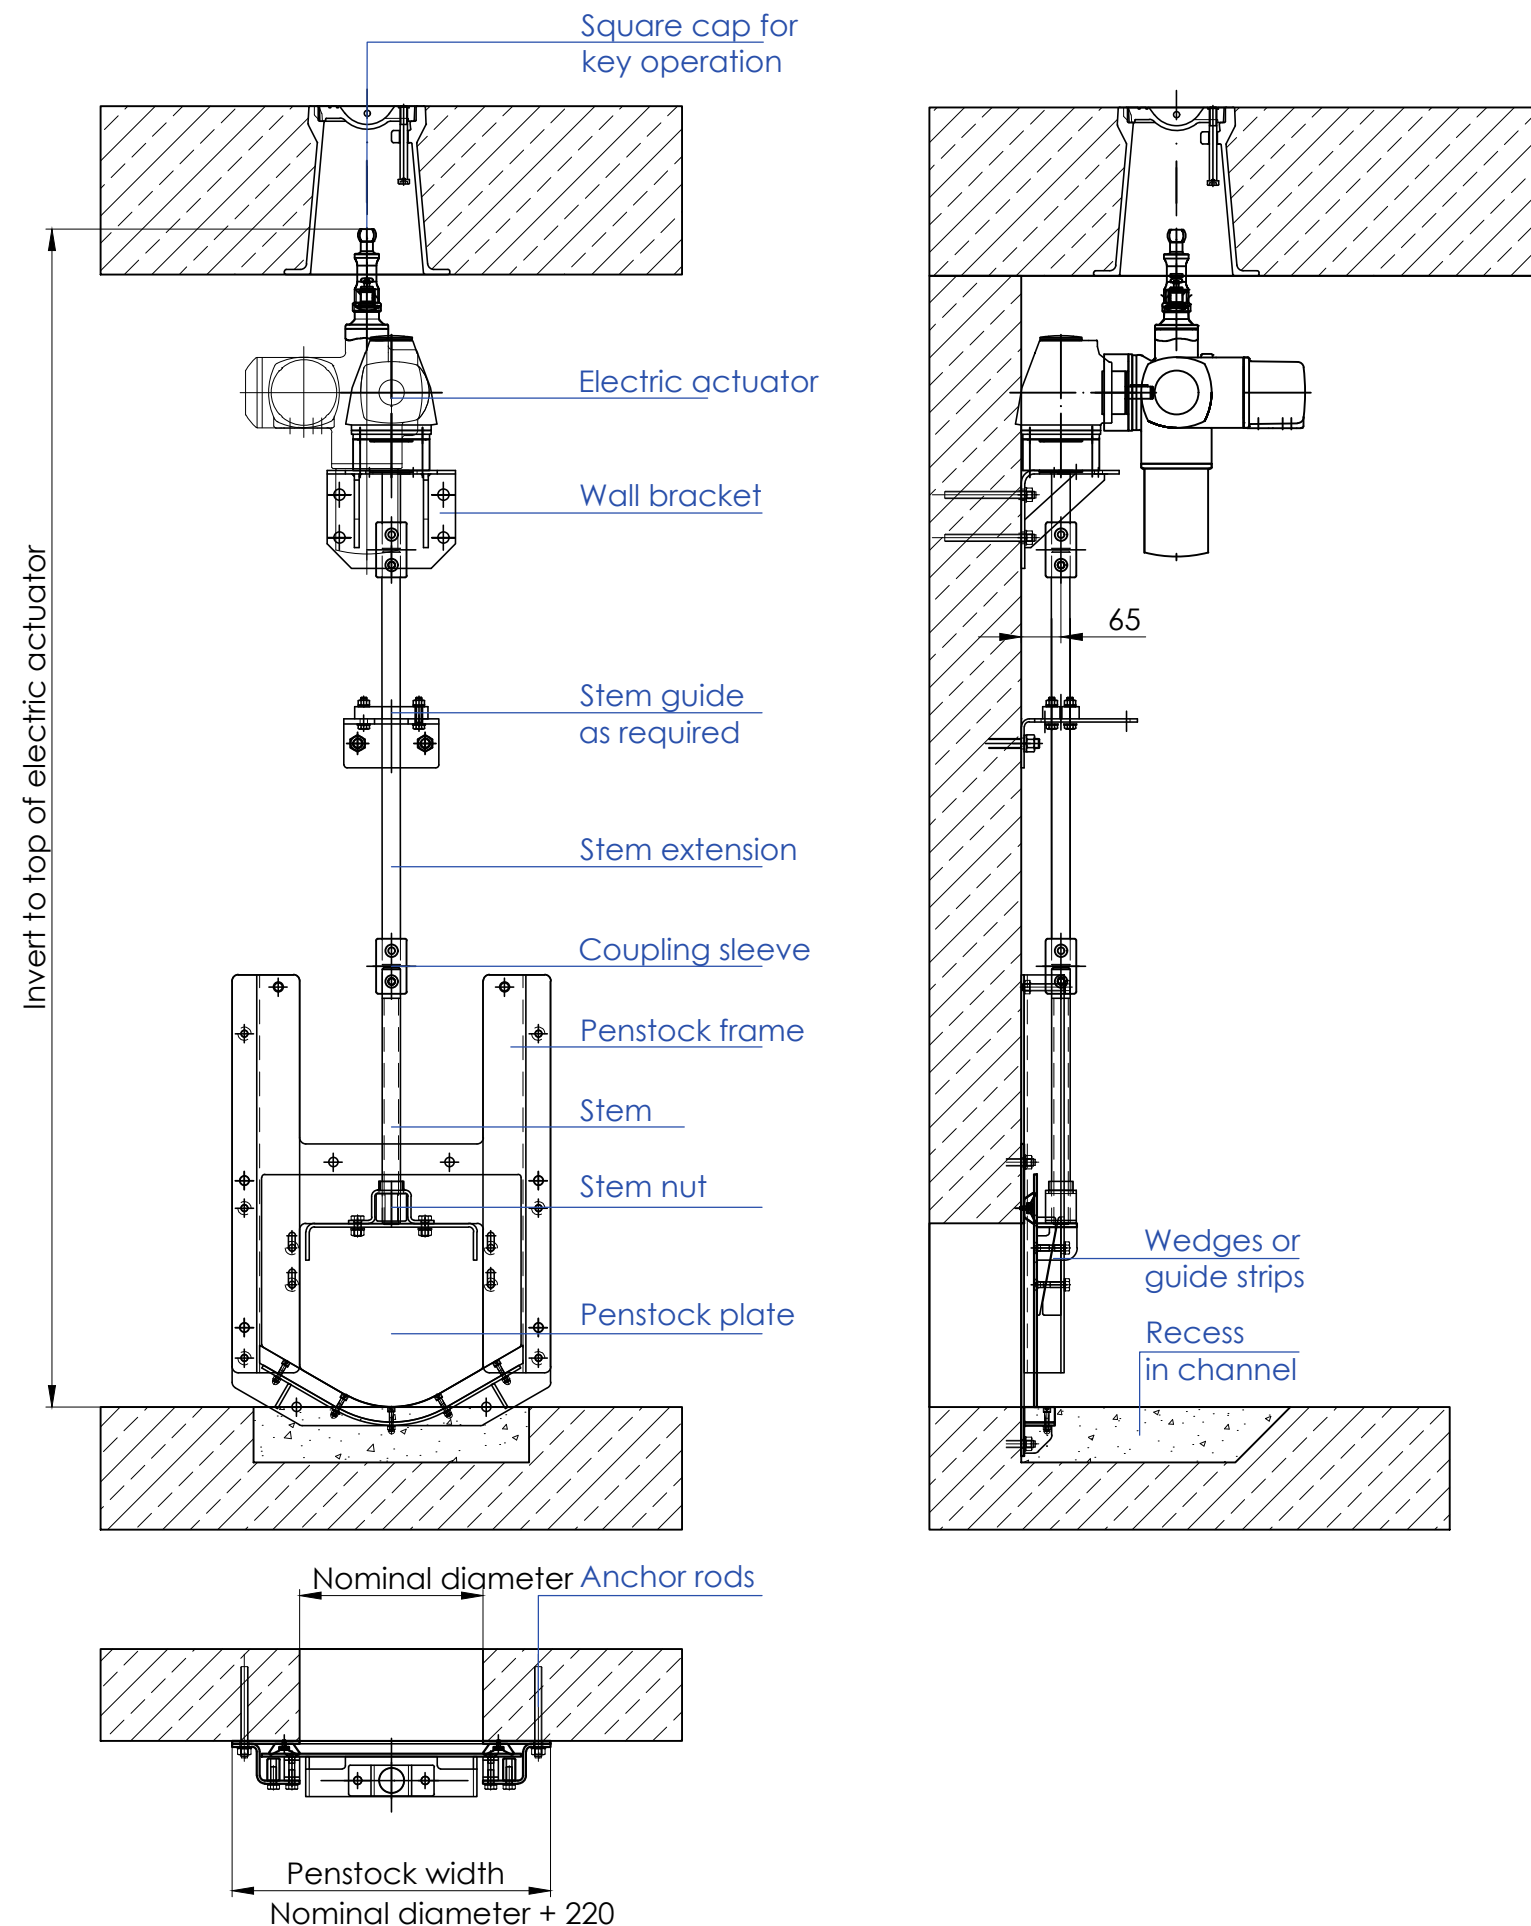

Planning drawing

PZ-G-E-004

Technical data

Type:

acc. to DIN 19569-4
four-sided sealing

Nominal diameter:

Installation:

Wall fixing version

Installation depth:

mm (invert to top of electric actuator)

Max. pressure:

6.0 mWC

Pressure side:

on- and off-seating

Operation

Drive:

Electric actuator on wall bracket (below ground)

Manufacturer:

Duty type:

Voltage:

400 V / 50 Hz / 3 ph

Local control unit:

Material

Plate / frame:

Stainless steel □ SS304 / □ SS316L

Seal:

EPDM

Wedges:

Plastic PA

Stem nut:

Bronze

Stem:

Stainless steel SS316L

Emergency operation

via square cap AF 30

from outside the manhole

with additional bevel gear

Supply includes

Stem extension

Anchor rods, mortar capsules

Sealant (290 ml cartridge)

Project-specific data

Client

Project

Structure

Item

Remarks

Quantity

Prepared by

Date

Contact

TESACO-TECHNIQUE GmbH

Tel. +49 6430 611030

info@tesaco.de

www.tesaco.de

It's this easy

1. Complete technical data

2. Add project data

3. Save PDF

4. Send to **TESACO**

Drawing no.:	PZ-G-E-004	Issue date:	27.06.2026	Revision: -	Sheet: 1 / 1
--------------	------------	-------------	------------	-------------	--------------

Note: This planning drawing shows the standard design and is intended as a planning reference.