

Technical data
Type:

acc. to DIN 19569-4
four-sided sealing

Nominal diameter:
Installation: Wall fixing version
Installation depth: mm (invert to top of structure)
Max. pressure: 6.0 mWC
Pressure side: on- and off-seating

Operation
Drive:

Traverse unit
with handwheel

Material




Plate / frame: Stainless steel □ SS304 / □ SS316L
Seal: EPDM
Wedges: Plastic PA
Stem nut: Bronze
Stem: Stainless steel SS316L

Supply includes

Stem extension
Anchor rods with mortar capsules
Sealant (290 ml cartridge)

Note

Suitable for low
structure heights.

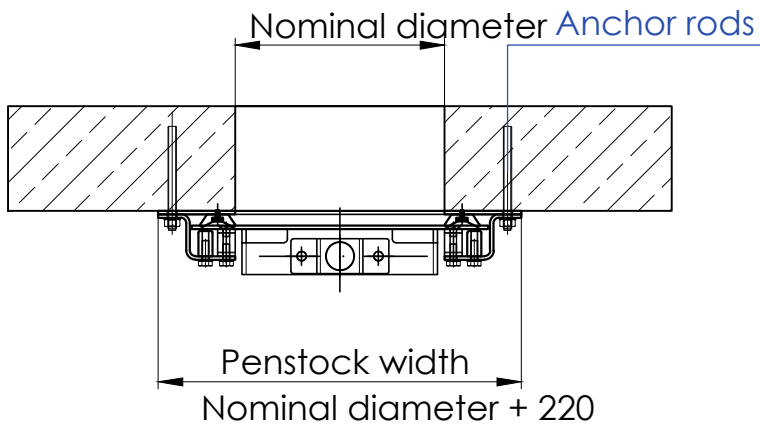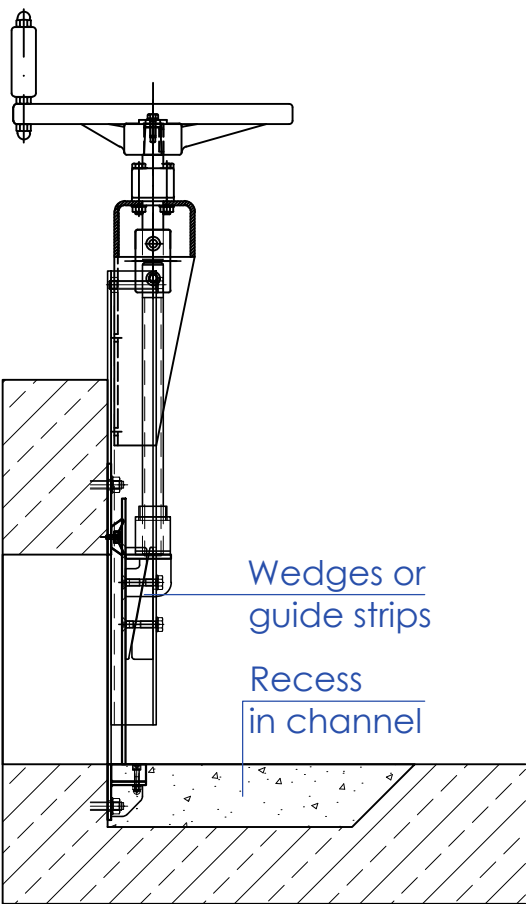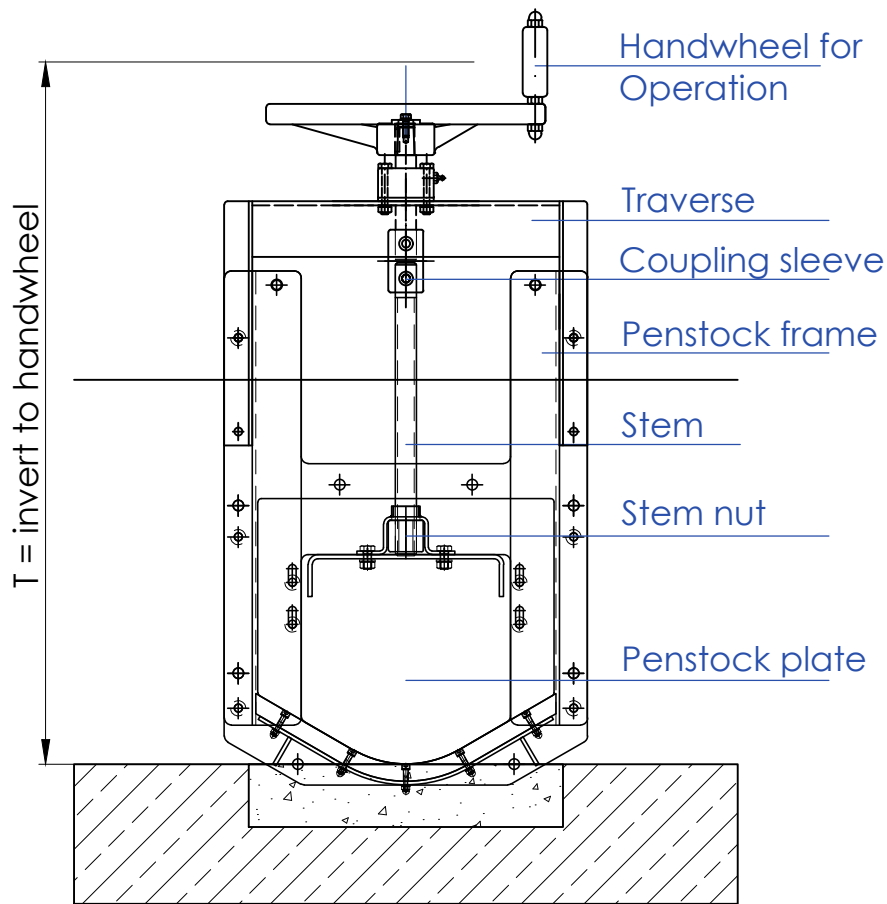

Project-specific data

Client

Project

Structure

Item

Remarks

Quantity

Prepared by

Date

Contact

TESACO-TECHNIQUE GmbH
Tel. +49 6430 611030
info@tesaco.de
www.tesaco.de

It's this easy
1. Complete technical
data
2. Add project data
3. Save PDF
4. Send to **TESACO**