
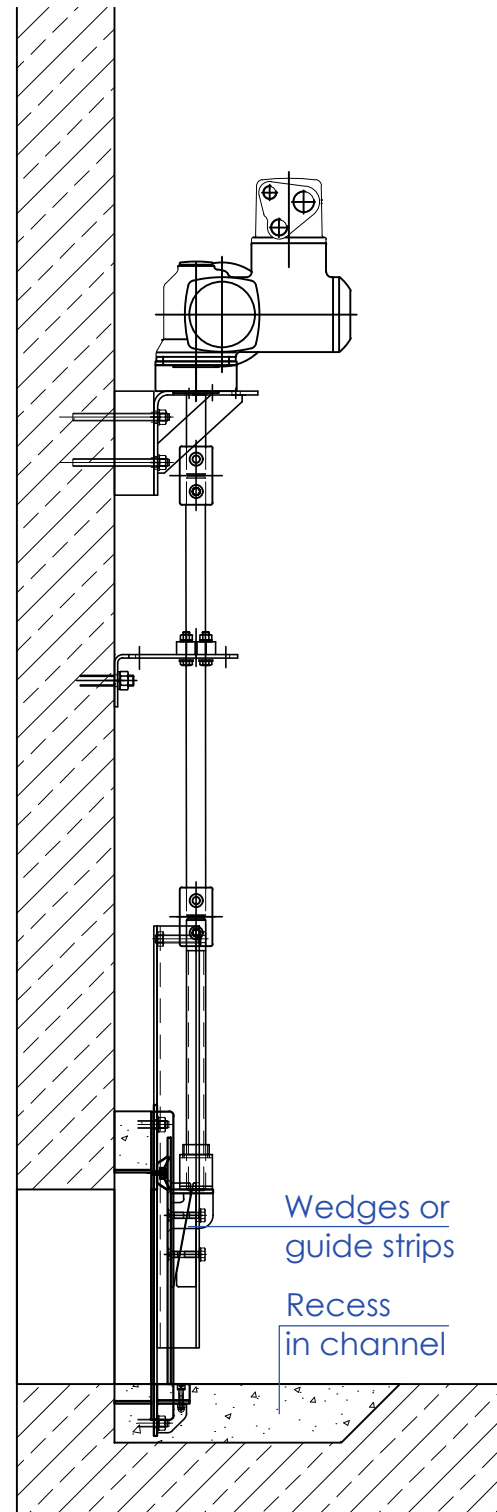


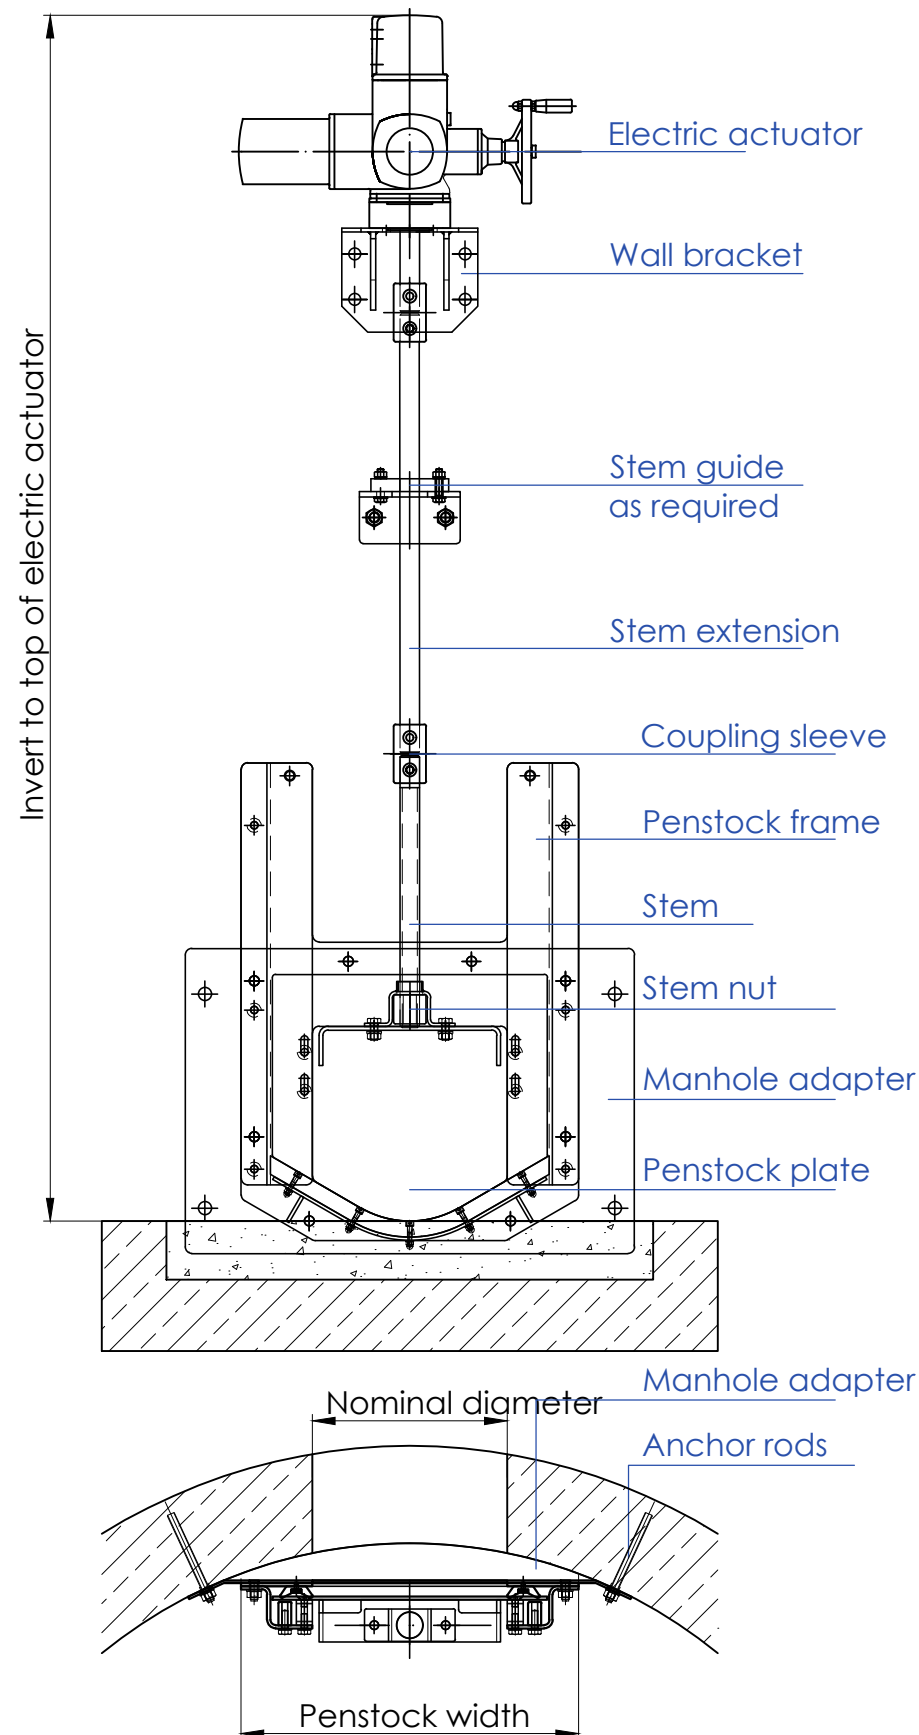

Planning drawing

PZ-R-E-003

Technical data

Type:

acc. to DIN 19569-4
four-sided sealing

Nominal diameter:

Installation:

Manhole adapter for round manhole

Fixing:

Wall fixing version Clamp mounting

Option:

Sealing collar

Installation depth:

mm (invert to top of electric actuator)

Max. pressure:

6.0 mWC

Pressure side:

on- and off-seating

Operation

Drive:

Electric actuator on wall bracket (below ground)

Manufacturer:

Duty type:

Voltage:

400 V / 50 Hz / 3 ph

Local control unit:

Material

Plate / frame:

Stainless steel □ SS304 / □ SS316L

Seal:

EPDM

Wedges:

Plastic PA

Stem nut:

Bronze

Stem:

Stainless steel SS316L

Supply includes

Stem extension

Anchor rods with mortar capsules

Sealant (290 ml cartridge)

Project-specific data

Client

Project

Structure

Item

Remarks

Quantity

Prepared by

Date

Contact

TESACO-TECHNIQUE GmbH

Tel. +49 6430 611030

info@tesaco.de

www.tesaco.de

It's this easy

1. Complete technical data

2. Add project data

3. Save PDF

4. Send to **TESACO**

Drawing no.:	PZ-R-E-003	Issue date:	27.06.2026	Revision: -	Sheet: 1 / 1
--------------	------------	-------------	------------	-------------	--------------

Note: This planning drawing shows the standard design and is intended as a planning reference.