


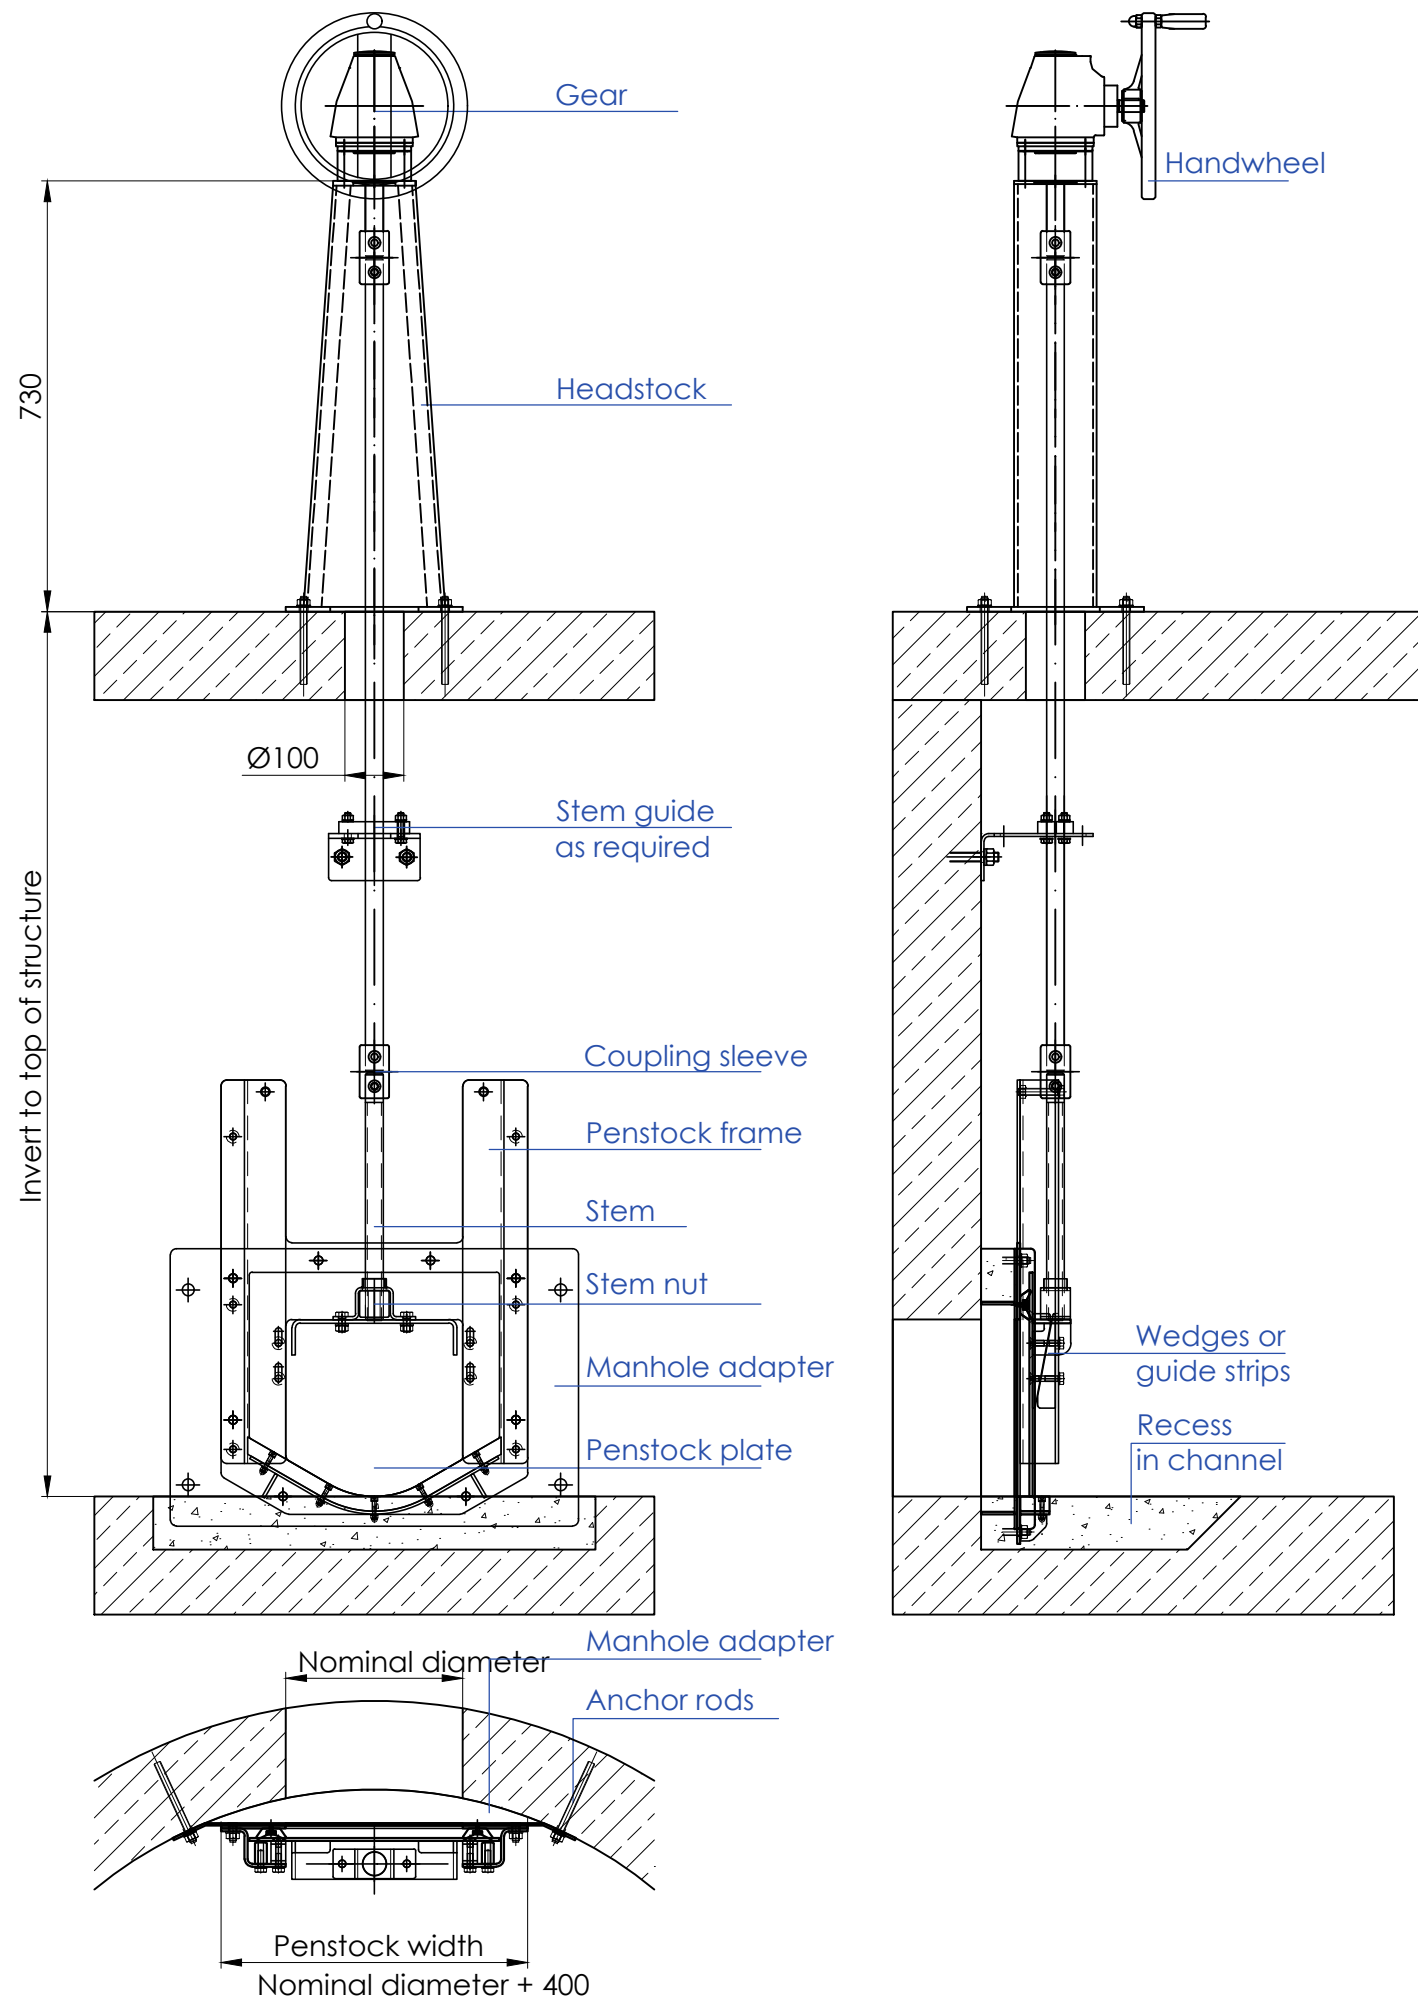

## Planning drawing

PZ-R-G-001

## Technical data

Type:

acc. to DIN 19569-4  
four-sided sealing

Nominal diameter:

Installation:

Manhole adapter for round manhole

Fixing:

Wall fixing      Clamp mounting

Option:

Sealing collar

Installation depth:

mm (invert to top of structure)

Max. pressure:

6.0 mWC

Pressure side:

on- and off-seating

## Operation

Drive:

Headstock on top slab  
with bevel gear

Manufacturer:

AUMA GK

## Material

Plate / frame:

Stainless steel □ SS304 / □ SS316L

Seal:

EPDM

Wedges:

Plastic PA

Stem nut:

Bronze

Stem:

Stainless steel SS316L

## Supply includes

Stem extension

Anchor rods with mortar capsules

Sealant (290 ml cartridge)

## Project-specific data

Client

Project

Structure

Item

Quantity

Remarks

Prepared by

Date

|                                                                                                |            |             |            |             |              |
|------------------------------------------------------------------------------------------------|------------|-------------|------------|-------------|--------------|
| Drawing no.:                                                                                   | PZ-R-G-001 | Issue date: | 27.06.2026 | Revision: - | Sheet: 1 / 1 |
| Note: This planning drawing shows the standard design and is intended as a planning reference. |            |             |            |             |              |

## Contact

**TESACO-TECHNIQUE GmbH**

Tel. +49 6430 611030

info@tesaco.de

www.tesaco.de

It's this easy

1. Complete technical data
2. Add project data
3. Save PDF
4. Send to **TESACO**